

Specification  
Constant Current  
LED Driver



# Specification

## Constant Current LED Driver

Model: GSS-75C-56B

Spec: 100W LED Driver

Version: V1.0

## Specification Constant Current LED Driver



# GSS-75C-56B

## Product Feature

1. Isolation scheme, High PF, Low THD
2. Constant Current Output
3. Low Ripple Current
4. Efficiency > 89%
5. Isolated Dimming: 0/1-10V, PWM, Resister
6. Protections: SCP/OCP/OVP/OTP
7. Lighting protection: CM 4KV/DM 4KV
8. Suffix "\*\*", B for dimming, H for auxiliary power 12V



## Input Characteristics

Item	Min.	Typ.	Max.	Remark
Voltage	100Vac		277Vac	
Frequency	47Hz	50/60Hz	63Hz	
I <sub>max</sub>			0.8A	100Vac, full load
PF	0.95	0.97		220Vac/50Hz, full load
	0.9			120-277Vac/50Hz, 70-100%, load
THD		8%	10%	220Vac/50Hz, full load
			15%	120-277Vac/50Hz, 70-100%, load
Pin			80W	100Vac, full load

Specification  
Constant Current  
LED Driver



Output Characteristics

Item	Min.	Typ.	Max.	Remark
Rated Current		1.55A		
Output Voltage Range	36V		56V	
Open-Circuit Voltage		60V		
Rated Power			68W	
Efficiency		87%		120Vac@42Vdc
		88%		220Vac@42Vdc
Current Accuracy	-5%		5%	
Run-up Time		≤1S		120Vac@42Vdc
		≤1S		220Vac@42Vdc
Line Regulation		< 2%		Rated output voltage
Load Regulation		< 2%		Rated input voltage

## Specification Constant Current LED Driver



## Other Performance

	Item	Min.	Typ.	Max.	Remark
0-10V Dimming (Optional)	Max Voltage	0V		12V	
	DIM Range	10%		100%	
	DIM Voltage	1V		10V	
PWM Dimming (Optional)	PWM High Level	3.3V		10.2V	
	PWM Low Level	0V		1V	
	PWM Frequency	500Hz		5KHz	
	PWM Duty	10%		100%	
Resistor Dimming (Optional)	DIM Resistance	10KΩ		100KΩ	
	DIM Range	10%		100%	
Dim to off	Turn off Voltage	3%	5%	7%	According to the voltage/ PWM/Resistor ratio
	Turn on Voltage	5%	7%	9%	

## Specification Constant Current LED Driver



## Environmental Requirements

Item	Min.	Typ.	Max.	Remark
Tc	-40°C	25°C	90°C	
Life Time		50000H		100%, load@Tc75°C
Tst	-40°C	25°C	90°C	
Operating Humidity	10%RH		90%RH	non-condensing
Store Humidity	5%RH		95%RH	
Pressure	70KPa		106KPa	

## Safety&EMC


Item	Standard	Remark
Safety Standard	UL8750	
Hi-Pot      Input/Case	1600Vac	Basic insulation
Insulation Resistance	≥10MΩ	500Vdc, 25°C, 70%RH
CE&RE	FCC CLASS B	
Surge	EN61000-4-5	L-N: 4KV L-PE: 4KV N-PE: 4KV

## Specification Constant Current LED Driver




## Characteristic Curve


### Efficiency VS Vout(Vin=120Vac)

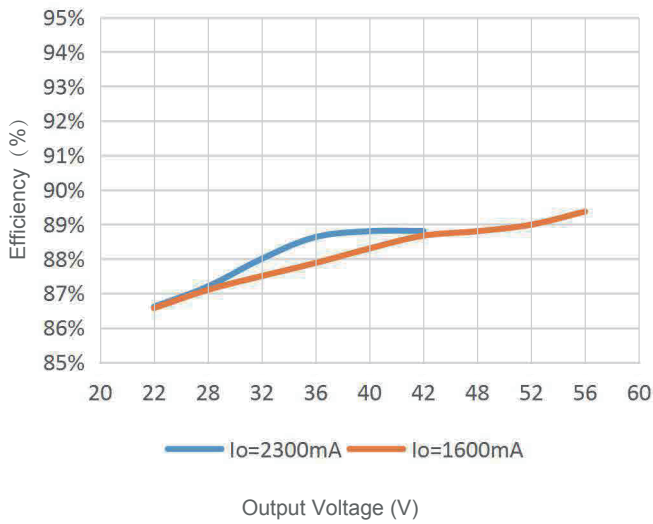


### Efficiency VS Vout(Vin=230Vac)

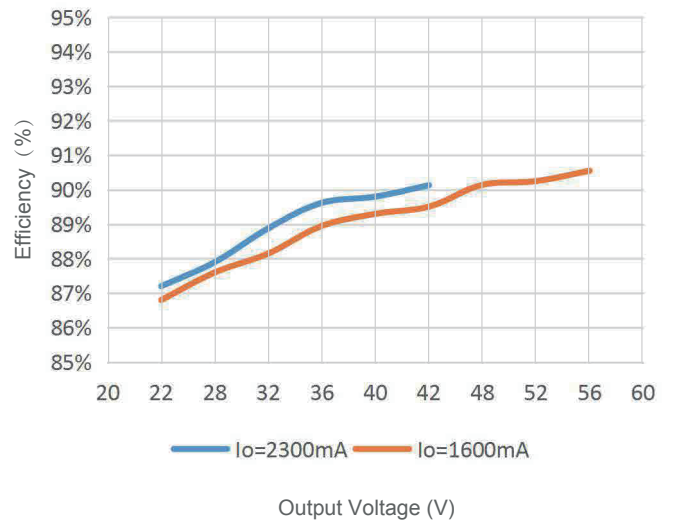

### Power Factor VS Output Power

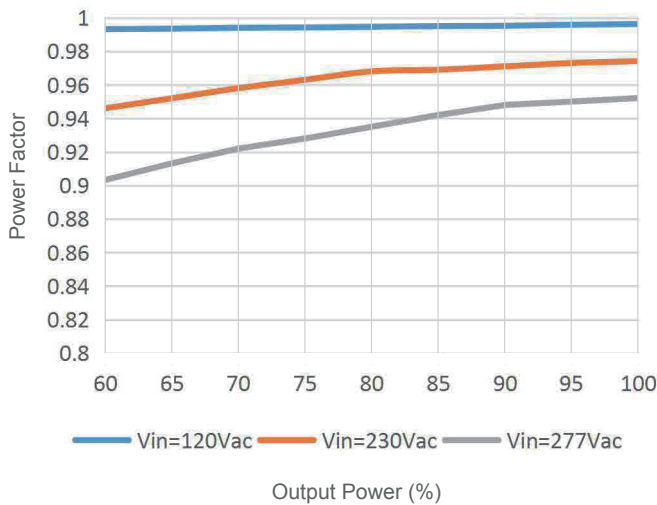

### THD VS Output Power

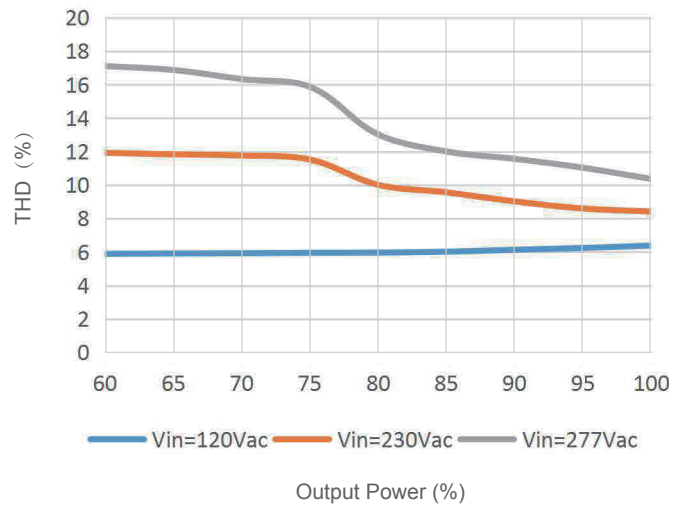


## Specification Constant Current LED Driver




## Characteristic Curve

### Output Power VS Dimming

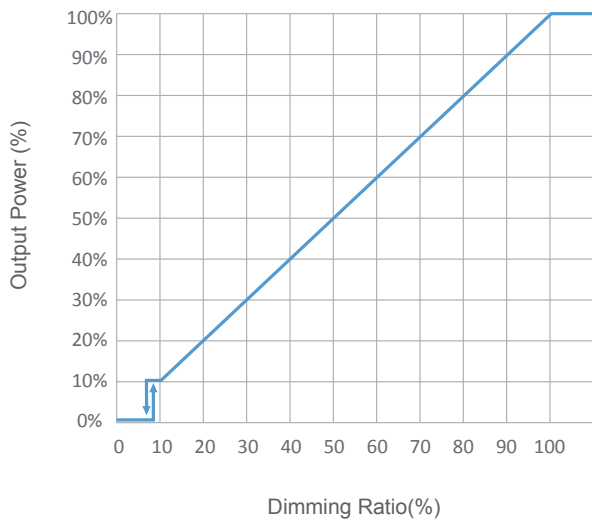

### Lifetime(Khours) VS Case Temperature

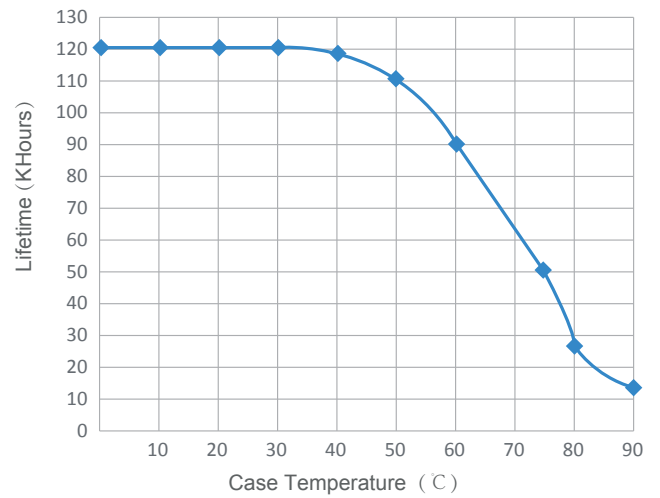



## Specification Constant Current LED Driver



### 2D Structure

Name Description	Standard Code	mm(In.)
Case Length	L3	285(11.22)
Case Width	W1	34(1.34)
Case Height	H	27(1.06)
Overall Length	L1	300(11.81)
Mounting Hole Length	L2	289(11.38)
Mounting Hole Width	W2	17(0.67)
TC Point Position	X	110(4.33)
TC Point Position	Y	15(0.59)

### Wiring Diagram

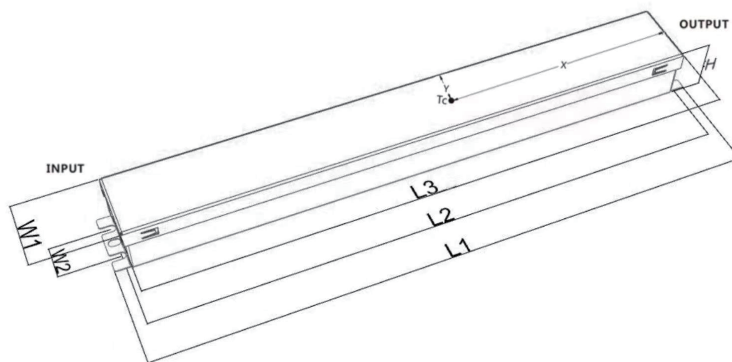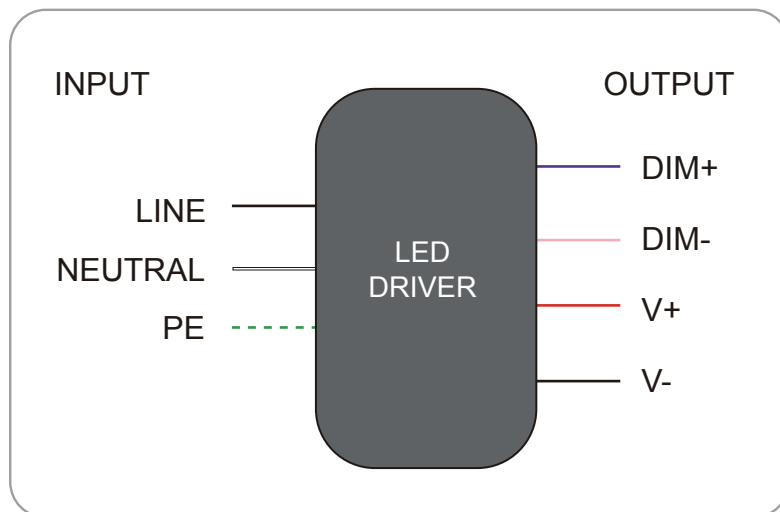

### Structure

Item	TYP.	Remark
Weight	600g	
Size	300mm*34mm*27mm	L*W*H
Input Wire	1015/600V/18AWG(黑:L,白:N,绿:PE)	UL
Output Wire	1015/600V/18AWG(红:LED+,黑:LED-)	UL
Dim Wire/AUX Wire	1569/300V/22AWG(紫: DIM+,粉: DIM-)	UL