




PETG Bypass T8 LED SMD Tube

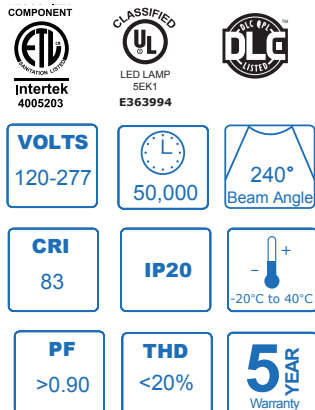

Americanlite® offer a premium quality UL-DLC LED Tubes can be widely used for various commercial and residential lighting applications, such as offices, shopping malls, parking lots, hotels, restaurants, hospitals, schools and many more.

- PET coated-glass housing
- 70% energy savings compared to traditional fluorescent tubes
- Environment friendly, no mercury or any other hazardous materials
- Powered on one end
- Complies with NSF-2 Standard (safe for food industry)

• Does not work with ballast

Ordering information

Model	W	Base	Color Temperature	Input Voltage	Lumens	Diffuser	Length
AL571208	12.5w	G13	3000K	120-277V	1650lm	Opal	120cm
AL571209	SUPERBRITE		4000K	120-277V	1700lm	Opal	120cm
AL571210			5000K	120-277V	1800lm	Opal	120cm
AL571211			6500K*	120-277V	1800lm	Opal	120cm
AL571300	14.5w	G13	3000K	120-277V	1800lm	Opal	120cm
AL571301			4000K	120-277V	1900lm	Opal	120cm
AL571302			5000K	120-277V	2000lm	Opal	120cm
AL571303			6500K*	120-277V	2000lm	Opal	120cm
AL571234	16.5w	G13	3000K	120-277V	2100lm	Opal	120cm
AL571235	SUPERBRITE		4000K	120-277V	2300lm	Opal	120cm
AL571236			5000K	120-277V	2400lm	Opal	120cm
AL571237			6500K*	120-277V	2400lm	Opal	120cm
AL571296	18w	G13	3000K	120-277V	2000lm	Opal	120cm
AL571297			4000K	120-277V	2100lm	Opal	120cm
AL571298			5000K	120-277V	2150lm	Opal	120cm
AL571299			6500K*	120-277V	2150lm	Opal	120cm

*No DLC for 6500K

Packing information

Color Sleeve packing

Model	CBM per master	Pieces per master	Box Dimensions (cm)	Gross weight (Kg)
12.5w / 14.5 / 16.5w / 18w	0.0438	25	128 x 18.5 x 18.5	7.5